


Basic Series 420

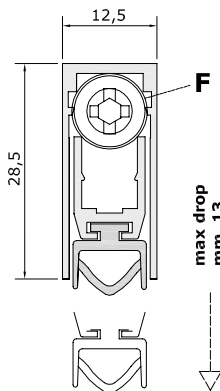

Certified for:

- Sound insulation
34 dB
- Fire resistance:
30 min. (EPDM standard gasket)
60 min. (optional silicon gasket)
- Insulation from smoke
2,30 m² / h / m - 25 Pa
- Usage cycles
200.000 cycles

Protects from:

- Air
- Water
- Light
- Insects

Not an obstacle for disabled persons

STANDARD ACCESSORIES




Standard measurements (mm)	330	430	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	130	130	200	200	200	200	200	200	200	200	200

FASTENING SYSTEMS


STANDARD



OPTIONAL



MAIN APPLICATIONS

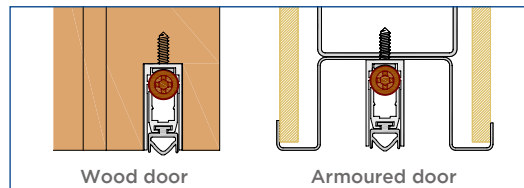

• **FEATURES** Mechanism with a single adjustment (screw F: descent) characterised by the controlled movement of the moving profile with gasket (immediate descent from the hinge side of the door and consequent gradual descent for the entire length) for adjustment to the floor.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060 - tubular gasket in EPDM - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - Ø 5 mm brass bushing - coil springs in treated stainless steel.

• VARIATIONS ON REQUEST

Button: hexagonal brass, square nylon, bevelled nylon.

Gasket: silicon tubular, brush

STANDARD PACKAGING

Cardboard box with 40 pcs + 40 standard accessory packs

OPTIONAL PACKAGING

Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions

OPTIONAL ACCESSORIES


Nylon plate



CA101 on smooth frame



Insulating nylon plate with silicon gasket

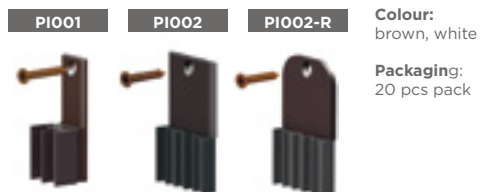

PI002 on smooth frame



Fixing brackets in steel and nylon



Colour: steel, brown

Packaging: 20 pcs pack